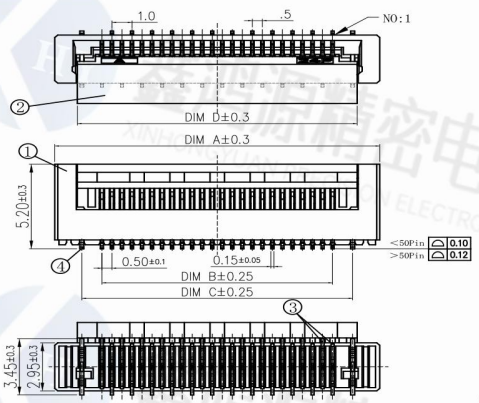







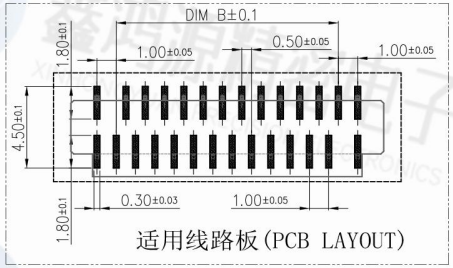

适用线路板(PCB LAYOUT)

①	0.5掀盖立式胶芯(H=5.2)	LCP UL94V-0	本色
②	0.5掀盖立式后盖(H=5.2)	LCP UL94V-0	黑色
③	0.5掀盖立式端子(H=5.2)	铜合金/表面镀金	
④	0.5掀盖立式焊片(H=5.2)	铜合金/表面镀锡	

技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、 缺陷、裂纹等现象.
2. 温度范围：-25° C～85° C.
3. 额定电压：50V，AC/DC(=等效).
4. 接触电阻：50mΩ.
5. 绝缘电阻:≥500MΩ.
6. 耐电压：150V AC/Minute
7. 产品料号：

LX0552-** * *-***

- NO OF CKT(产品PIN数)
- Plating(电镀方式)
  - 0:端子全雾锡
  - 1:端子全金
  - 2:端子点镀金
- Packing(包装方式)
  - R:TAPE & REEL卷装
- 流水码

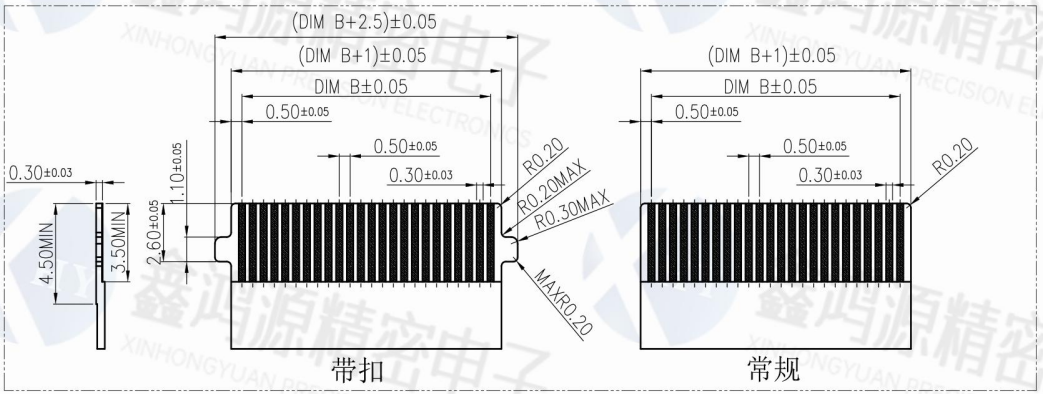

适用扁平线(Applicable Flat Cable)

CKT	DIM A	DIM B	DIM C	DIM D	CKT	DIM A	DIM B	DIM C	DIM D
5	6.70	2.00	4.00	4.45	43	25.70	21.00	23.00	23.45
6	7.20	2.50	4.50	4.95	44	26.20	21.50	23.50	23.95
7	7.70	3.00	5.00	5.45	45	26.70	22.00	24.00	24.45
8	8.20	3.50	5.50	5.95	46	27.20	22.50	24.50	24.95
9	8.70	4.00	6.00	6.45	47	27.70	23.00	25.00	25.45
10	9.20	4.50	6.50	6.95	48	28.20	23.50	25.50	25.95
11	9.70	5.00	7.00	7.45	49	28.70	24.00	26.00	26.45
12	10.20	5.50	7.50	7.95	50	29.20	24.50	26.50	26.95
13	10.70	6.00	8.00	8.45	51	29.70	25.00	27.00	27.45
14	11.20	6.50	8.50	8.95	52	30.20	25.50	27.50	27.95
15	11.70	7.00	9.00	9.45	53	30.70	26.00	28.00	28.45
16	12.20	7.50	9.50	9.95	54	31.20	26.50	28.50	28.95
17	12.70	8.00	10.00	10.45	55	31.70	27.00	29.00	29.45
18	13.20	8.50	10.50	10.95	56	32.20	27.50	29.50	29.95
19	13.70	9.00	11.00	11.45	57	32.70	28.00	30.00	30.45
20	14.20	9.50	11.50	11.95	58	33.20	28.50	30.50	30.95
21	14.70	10.00	12.00	12.45	59	33.70	29.00	31.00	31.45
22	15.20	10.50	12.50	12.95	60	34.20	29.50	31.50	31.95
23	15.70	11.00	13.00	13.45	61	34.70	30.00	32.00	32.45
24	16.20	11.50	13.50	13.95	62	35.20	30.50	32.50	32.95
25	16.70	12.00	14.00	14.45	63	35.70	31.00	33.00	33.45
26	17.20	12.50	14.50	14.95	64	36.20	31.50	33.50	33.95
27	17.70	13.00	15.00	15.45	65	36.70	32.00	34.00	34.45
28	18.20	13.50	15.50	15.95	66	37.20	32.50	34.50	34.95
29	18.70	14.00	16.00	16.45	67	37.70	33.00	35.00	35.45
30	19.20	14.50	16.50	16.95	68	38.20	33.50	35.50	35.95
31	19.70	15.00	17.00	17.45	69	38.70	34.00	36.00	36.45
32	20.20	15.50	17.50	17.95	70	39.20	34.50	36.50	36.95
33	20.70	16.00	18.00	18.45					
34	21.20	16.50	18.50	18.95					
35	21.70	17.00	19.00	19.45					
36	22.20	17.50	19.50	19.95					
37	22.70	18.00	20.00	20.45					
38	23.20	18.50	20.50	20.95					
39	23.70	19.00	21.00	21.45					
40	24.20	19.50	21.50	21.95					
41	24.70	20.00	22.00	22.45					
42	25.20	20.50	22.50	22.95					

Xihoy 深圳市鑫鸿源精密电子有限公司
Shenzhen Xinhongyuan Precision Electronics Co., Ltd.
财富热线电话： 13670232690
工厂地址：深圳市宝安区新桥街道象山社区132号17栋7楼

PART NO	LX0552-** * *-***	4	STATOR	PHOSPHOR BRONZE		0	DAR. BY MR. ZHANG	DATE: 2016.06.08	UNLESS OTHERWISE SPECIFIED TOLERANCE
PART NAME	0.5 Pitch掀盖立式带扣正脚(H=5.2)	3	TERMINAL	PHOSPHOR BRONZE		POSITIONS			ANG ±3.0° / .X ±0.20 / .XX ±2.0° / .XXX ±1.0° / DMI .X ±0.20 / .XX ±0.10 / .XXX ±0.05
ANGLE PROJECTION	UNIT mm	2	COVER	THERMCPLASTIC UL94V-0	BLACK	1	CHK. BY MR. WANG	SCALE 1/1	
	SCALE 1:1	1	HOUSING	THERMCPLASTIC UL94V-0	NATURAL	0	APP. BY MISS. LU	UNIT MM	
		NO.	COMPONENTS	MATERIALS	FINISH/COLOR SPECIFICATION	QUANTITY			